

MOUNT BURGESS MINING N.L.

ACN: 009 067 476

Level 4, 109 St Georges Terrace, Perth, Western Australia, 6000
PO Box Z5301, St Georges Terrace, Perth, Western Australia, 6831
Telephone: (61 8) 9322 6311 Email: mtb@mountburgess.com
Facsimile: (61 8) 9322 4607 Website: www.mountburgess.com

ASX RELEASE

22 May 2006

Intersection of **Zinc Sulphides (Sphalerite)** and **Lead Sulphides (Galena)**

Kihabe Base Metals Project, Botswana
(Mount Burgess Mining NL 100%)

The Reverse Circulation (RC) infill drilling programme on the above project, designed to outline the overall geometry and grades of mineralisation to 150m vertical depth is continuing. Drill logs have now been received for KRC 021 and KRC 022, drilled on Section 8, (refer to diagram attached).

KRC 021 (7821706N/501091E, -60deg/339deg) was drilled to test for mineralisation down to 100m vertical depth

As anticipated, the following intersections were logged.

4 - 30 m	Hangingwall dolomite with shear zones/fracture zones and trace oxidized sulphides
68 - 74 m	Quartzite containing 10% Sphalerite ? and 5-15% Galena
84 - 92 m	Quartzite containing 3 - 20% sulphides - predominantly Galena
138 - 148 m	Quartzite containing 4 - 20% sulphides - 50% of which are Sphalerite and Galena

KRC 022 (7821675N/501110E -60deg/339deg) was drilled underneath and down dip of KRC 021, to test for mineralisation down to 150m vertical depth.

As anticipated, the following intersections were logged.

9 - 74 m	Hangingwall dolomite
114 - 126 m	Quartzite containing 10-50% sulphides with 25-50% Sphalerite between 122-124 metres
129 - 151 m	Quartzite containing 5-10% Sphalerite and Galena
160 - 170 m	Quartzite containing 5-50% Sphalerite and Galena


Consistent with previous drilling the mineralised zones were intersected in a quartzite unit below a very cohesive dolomite hangingwall.

Assay results from drill holes KRC 016, 017, 018, 019, 020, 021 and 022 will be announced to the market as soon as available. Whilst sample preparation at the laboratory is proceeding according to plan, delays in receiving assay results have been caused through further operating problems with the laboratory's ICP machine and time taken to import a replacement for the faulty part. Latest reports from the laboratory confirm that this part has now been received and is currently being installed.

Drilling is proceeding on Section 8 with KRC 023 being drilled 25 m in front of KRC 021.

The Company has previously drilled and announced assay results from five wide spaced drill sections along a zinc, lead and silver soil geochemical anomaly, which is 2.4 km in length. These results have yielded average grades of 3% zinc, 1% lead and 28 g/t silver, with significant credits for copper and vanadium. A scoping study conducted by ProMet Engineers, has estimated some 17,500,000 tonnes to 100m depth. An infill drilling programme is currently being conducted with the intention of upgrading this zone of mineralisation to an open pittable JORC compliant resource/ reserve down to a vertical depth of 150m.

The information in this report that relates to exploration results, together with any related assessments and interpretations, is based on information compiled by Martin Spence, B.Sc., who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Spence is a full time employee of the Company. Mr Spence has sufficient experience which is relevant to the style of mineralisation under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2004 Edition of the "Australasian Code for Reporting of Mineral Resources and Ore Reserves". Mr Spence consents to the inclusion in the report of the matters based on this information in the form and context in which it appears.

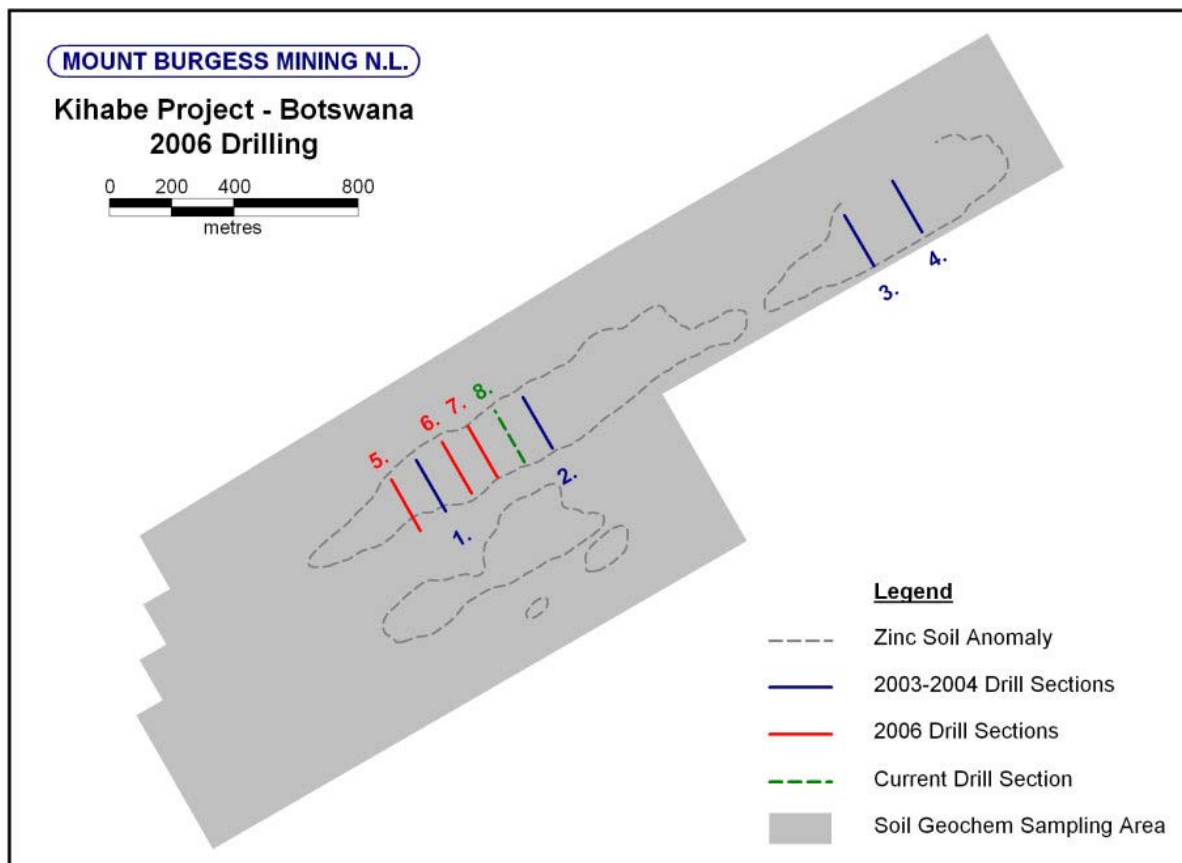

For further information please contact:

Nigel Forrester

CEO

Mount Burgess Mining N.L

T: ++ 61 89 322 6311

F: ++ 61 89 322 4607

W: www.mountburgess.com

E: mtb@mountburgess.com

or **Martin Spence**

Director of Exploration