

# MOUNT BURGESS MINING N.L.

ACN: 009 067 476

Level 4, 109 St Georges Terrace, Perth, Western Australia, 6000  
PO Box Z5301, St Georges Terrace, Perth, Western Australia, 6831  
Telephone: (61 8) 9322 6311 Email: mtb@mountburgess.com  
Facsimile: (61 8) 9322 4607 Website: www.mountburgess.com

## ASX RELEASE

29 May 2006

### Intersections of Zinc Sulphides (Sphalerite) together with Lead Sulphides (Galena)

Kihabe Base Metals Project, Botswana  
(Mount Burgess Mining NL 100%)


The Reverse Circulation (RC) infill drilling programme is continuing on the above project, designed to outline the overall geometry and grades of mineralisation to 150m vertical depth. Since announcing drill logs of KRC 024 to the market on 26<sup>th</sup> May, **the Company resolved to deepen this drill hole.** Drill logs for the **deeper sections** have now been received for KRC 024 drilled on Section 8 – see diagram below.

**KRC 024** (7821748N/501067E, -60deg/339deg) was drilled in front and up-dip of KRC 023 to test for mineralisation associated with that encountered at lower depths in KRC 023.

The following intersections (**revised to incorporate the deeper drilling**) were logged:

Between 19m and 124m there are **9 zones** totaling **55m** which contain **5% to 50% Sphalerite** (**50% Sphalerite** was logged at 25m – 26m and 72m – 73m, **40% Sphalerite** was logged at 103m-104m, **30% Sphalerite** was logged at 102 – 103m, 112m – 113m and 120 m – 121m and **25% Sphalerite** was logged at 100m – 101m and 116 – 117m.

Between 28m and 123m there are **9 zones** totaling **58m** which contain **5% to 25% Galena**.

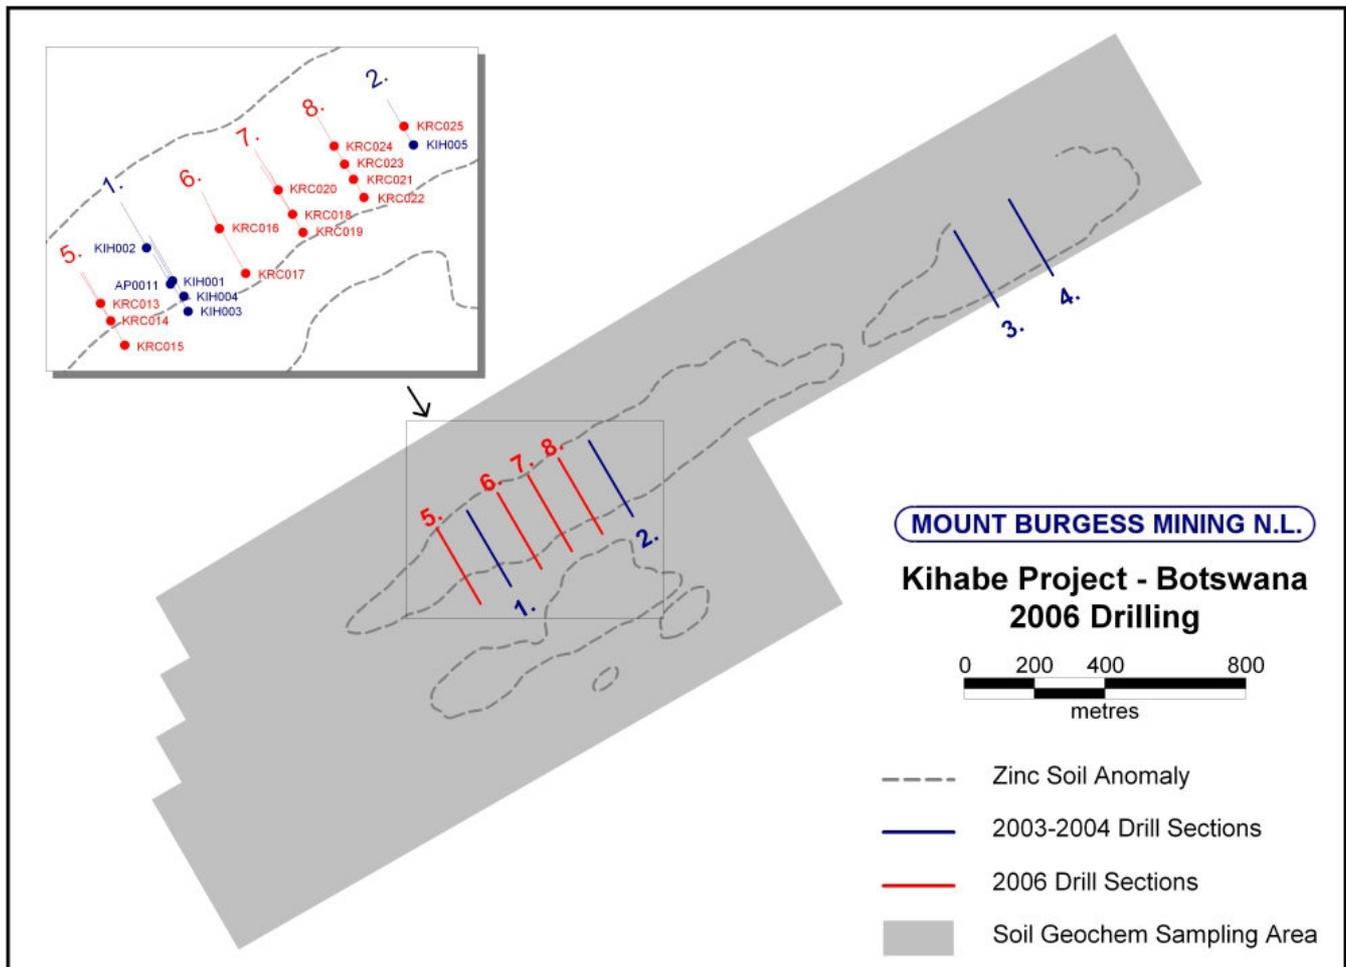

Consistent with previous drilling, the mineralised zones were intersected in a quartzite unit below a very cohesive dolomite hangingwall.

The drill rig has now moved to Section 2 with KRC 025 being drilled 30m in front and up-dip of KIH 005.

The Company is still waiting for assay results from Drill Holes KRC 016 to KRC 024.

The Company has previously drilled and announced assay results from five wide spaced drill sections along a zinc, lead and silver soil geochemical anomaly, which is 2.4 km in length. These results have yielded average grades of 3% zinc, 1% lead and 28 g/t silver, with significant credits for copper and vanadium. A scoping study conducted by ProMet Engineers, has estimated some 17,500,000 tonnes to 100m depth. An infill drilling programme is currently being conducted with the intention of upgrading this zone of mineralisation to an open pittable JORC compliant resource/ reserve down to a vertical depth of 150m.

*The information in this report that relates to exploration results, together with any related assessments and interpretations, is based on information compiled by Martin Spence, B.Sc., who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Spence is a full time employee of the Company. Mr Spence has sufficient experience which is relevant to the style of mineralisation under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2004 Edition of the "Australasian Code for Reporting of Mineral Resources and Ore Reserves". Mr Spence consents to the inclusion in the report of the matters based on this information in the form and context in which it appears.*

For further information please contact:

**Nigel Forrester**

CEO

Mount Burgess Mining N.L

T: ++ 61 89 322 6311

F: ++ 61 89 322 4607

W: [www.mountburgess.com](http://www.mountburgess.com)

or **Martin Spence**

Director of Exploration